IP2500/2501 SERIES





Product Description

The IP2500/IP2501 is a full duplex VoIP speakerphone that provides a reliable and direct communication with first responders. Available with both flush and surface mounts and single- or double- button options, its compact size and SIP capabilities make it ideal for a wide range of indoor and outdoor locations, like hallways, stairwells, classrooms, subway cars, parking garages, elevators and door entries.

Standard Features

- ✓ Full duplex
- ✓ PoE power
- ✓ Self-monitoring
- Proprietary screws for vandal resistance
- ✓ Piezoelectric buttons that won't stick or jam

Popular Upgrades



ToolVox™ XV Virtual Machine



Server







Available Configurations



Single Button Surface Mount IP2500-s



Dual Button Surface Mount IP2500-d



Single Button Flush Mount IP2501-s



Dual Button Flush Mount IP2501-d



Technical Features

E Specifications

- Dimensions:
 - Surface: 7.15" W x 7.41" H x 2.00"D (18.16 x 18.82 x 5.08 cm)
 - Flush: 9" W x 9" H x 2.3" D (22.86 x 22.86 x 5.84 cm)
- **Contact Closures-OUT: 1**
- Ethernet Ports: 1
- Power: PoE
- **RAM:** 1MB
- Operational Temperature: -40°C to 70° C (-40° F to 158° F)

Mounting

- Flush
- Surface

Faceplate

- Piezoelectric data button
- ADA Braille bezel
- Conformal coated PCB
- 2 LED status indicator lights

Style

- Large Bezel Text: Push For Help, Emergency
- Small Bezel Text: Info, Call
- Custom Options Available

KFunctionality


- Self-monitoring
- Number storage
- Message storage






UL 62368-1


IP2500 Surface Mount

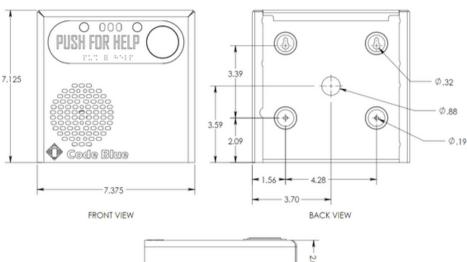



IP2501 Flush Mount

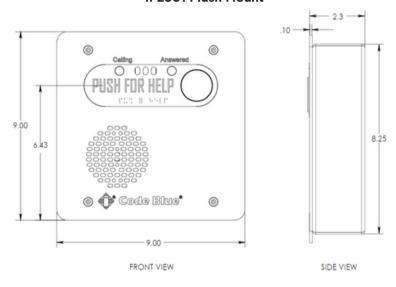

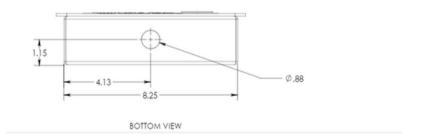

Note: Specifications subject to change without notice or obligation on the part of Code Blue Corporation