



Product Description

The **IP2500/IP2501** is a full duplex VoIP speakerphone that provides a reliable and direct communication with first responders. Available with both flush and surface mounts and single- or double- button options, its compact size and SIP capabilities make it ideal for a wide range of indoor and outdoor locations, like hallways, stairwells, classrooms, subway cars, parking garages, elevators and door entries.

Standard Features

- ✓ Full duplex
- ✓ PoE power
- ✓ Self-monitoring
- ✓ Proprietary screws for vandal resistance
- ✓ Piezoelectric buttons that won't stick or jam

Popular Upgrades



ToolVox™ XV
Virtual Machine



ToolVox™ XS
Server



Managed Cloud Solutions



Remote Mounted
Strobe



Hearing Loop

Available Configurations



Single Button
Surface Mount
IP2500-s



Dual Button
Surface Mount
IP2500-d



Single Button
Flush Mount
IP2501-s



Dual Button
Flush Mount
IP2501-d

Technical Features

Specifications

• Dimensions:

- **Surface:** 7.15" W x 7.41" H x 2.00"D (18.16 x 18.82 x 5.08 cm)
- **Flush:** 9" W x 9" H x 2.3" D (22.86 x 22.86 x 5.84 cm)

• Contact Closures-OUT: 1

• Ethernet Ports: 1

• Power: PoE

• RAM: 1MB

• Operational Temperature: -40°C to 70° C (-40° F to 158° F)

Mounting

- Flush (IP2501)
- Surface (IP2500)

Faceplate

- Piezoelectric data button
- ADA Braille bezel
- Conformal coated PCB
- 2 LED status indicator lights

Style

- Large Bezel Text: Push For Help, Emergency
- Small Bezel Text: Info, Call
- Custom Options Available


Functionality

- Self-monitoring
- Number storage
- Message storage


Compliance

- UL 62368-1

IP2500 Surface Mount

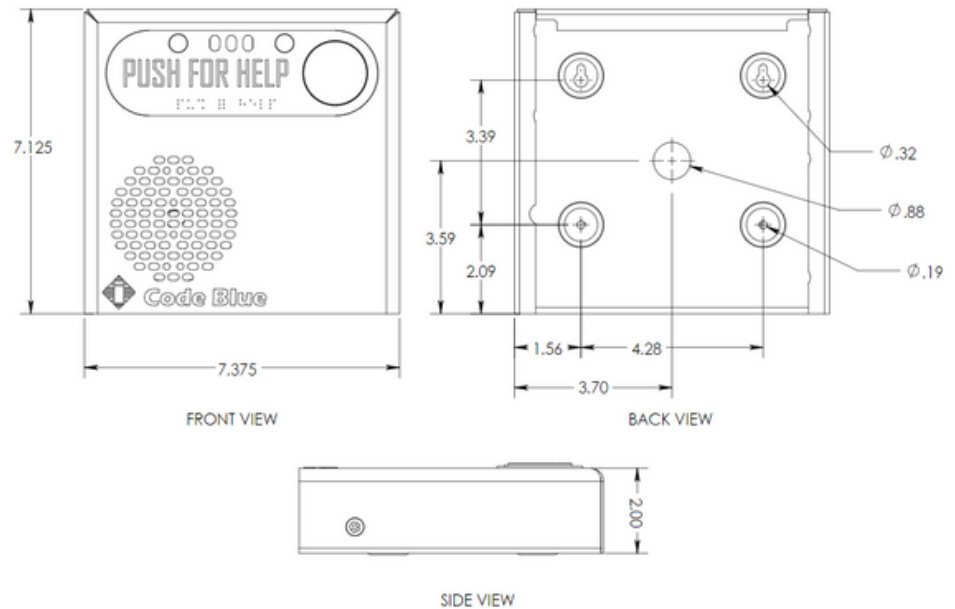

IP2501 Flush Mount

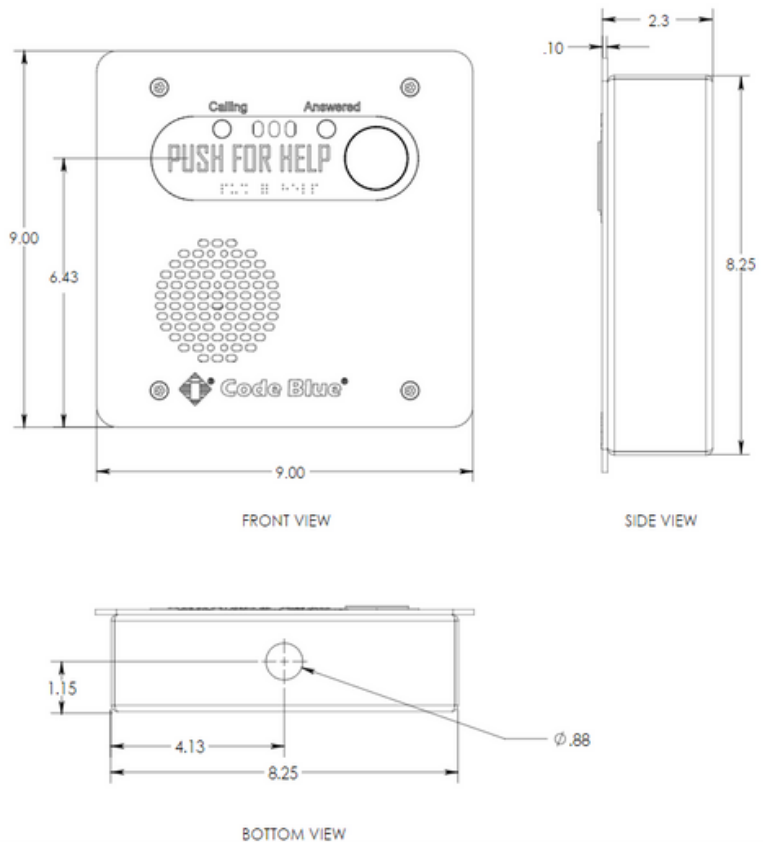

Note: Specifications subject to change without notice or obligation on the part of Code Blue Corporation.