



Product Description


A highly versatile emergency management platform for your blue light phone network, the **Blue Alert® Connect** and **Blue Alert® Monitor** Media Gateway and administration software offers unique real-time monitoring and reporting options, effectively acting as a hub for connecting devices. It also provides connections to PBX, public telephone (PSTN) and Internet (ISP) networks, in addition to third party security platforms.

Where IP and Analog Meet



BLUE ALERT®
CONNECT
BLUE ALERT®
MONITOR

Interconnections via: **IP:** PJSIP, H.323
Analog: T1 PRI, Phone Lines

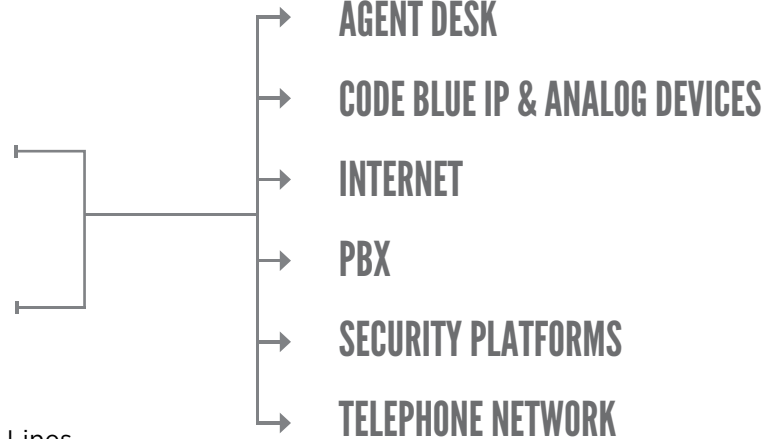

Standard Features



Generate dial tone for IP and analog emergency phones. Support 200+ simultaneous calls



Connect to PBX, public telephone (PSTN) and internet (ISP) networks and third party security platforms



Schedule reports and run tests of connected devices to ensure the speakers, buttons and microphones are working properly at all times.



Remotely monitor Code Blue phones and third-party devices.

Popular Upgrades



Blue Alert Connect, Advanced Paging License:

Set up multicast and scheduled automated paging through our Blue Alert® Connect Platform.



FXO/FXS Gateways:

FXO & FXS gateways connect analog phones and PSTN trunk lines to IP networks.

Technical Features

Software Features

- Remotely monitor emergency phones and audio paging speakers
- Schedule and run tests of connected devices
- Generate dial tone for IP and analog emergency phones Support up to 200 simultaneous calls
- Connect to PBX, public telephone (PSTN) and internet (ISP) networks and third party security platforms

Protocols

- H.323
- IAX
- PJSIP

Codecs

- G.711 (A-Law & u-Law)
- G.722
- G.726
- GSM
- and more!

Traditional Telephony Interoperability

- Works with FXS/FXO Module

Additional Configuration

- Remote technical support

Support Plans

- 5 hours
- 7.5 hours
- 10 hours

Options

- T1 Interface
- FXO Interface
- FXO/FXS Interoperability

Available Formats

ToolVox™ XS

SERVER APPLIANCE



Hardware Features

- **1U rack-mountable chassis size**
 - **Height:** 1.7"
 - **Width:** 19"
 - **Depth:** 22.5"
 - **Weight:** 26.89 lbs.
- Latest Debian 12 OS
- Swappable RAID drives

Did you know?

You can add up to **1000 devices** to a ToolVox™ server appliance or Virtual Machine.

ToolVox™ XV

VM DOWNLOAD

Download File Types

- OVA
- OVF
- Others available upon request.

Pre-Configured Specs

- Pre-Installed OS
- Pre-Configured Application
- Quad Core CPU
- 16G RAM
- 50G Dynamic Hard Drive



Provisioning

- Provided via an onsite VPN Router

Note: Specifications subject to change without notice or obligation on the part of Code Blue Corporation.