CENTRY® HELP POINT®





Product Description

Centry® is Code Blue's smallest Help Point®. Highlighted by a powerful station beacon light and emergency phone capabilities, the multifaceted device provides a reliable hands-free link to first responders. IP video capabilities for indoor environments allow you to bring the safety & security of the blue light inside. Centry® provides a litany of features previously unavailable in emergency or assistance phones, making it an excellent choice for building entrances, hallways and more.

Standard Features

- **✓** Fixed IP color camera for indoor applications
- ✓ Available in Flush-mount or Surface-mount
- ✓ Ring-lit piezoelectric buttons that won't stick or jam
- ✓ Full duplex communication
- PoE power
- ✓ Vandal-resistant screws

Popular Upgrades



ToolVox™ XV Virtual Machine



ToolVox™ XS Server





Remote Mounted Strobe





Technical Features

Code Blue

Specifications

- Dimensions:
 - Surface: 4.75" W x 10.25" H x 2.875" D (12.07 x 26.04 x 7.30 cm)
 - Flush: 4.5" W x 10" H x 3.125" D (11.43 x 25.4 x 7.94 cm)
- Weight: 4 lbs. (1.81 kg) Contact Closures-IN: 3 **Contact Closures-OUT: 3**
- **Ethernet Ports:** 3
- Power: PoE 802.3 at/af
- RAM: 4GB
- Operational Temperature:-40° C to 70° C (-40° F to 158° F)

Button

- Piezoelectric data buttons
- 25mm ring-lit RGB LED



LED station beacon



- ADA Braille text
- Conformal coated PCB

🕶 Style

- Text: Assistance, Emergency
- Text Colors: Black, Blue, Red
 - Custom Options Available

▶ Video*

- Sensor: 1/4" CMOS
- Lens: 125° fixed wide angle focus
- Focusing Range: 60cm
- Light Sensitivity: 600 mV/Luxsec
- Max Resolution: Up to 1080p
- Frames per Second: Up to 30fps
- Codecs: H.264, MPEG-4, Motion JPEG
- Environmental: Indoor Applications
- *For units configured with camera option only

Compliance

- Built to NEMA 3 Specifications
- UL 2017
- UL 60950-22
- UL 62368-1

Available Configurations







Flush Mount

4.50

4.00

0

EMERGENCY


FRONT VIEW

1.36


0


10.00

9.49



Surface Mount

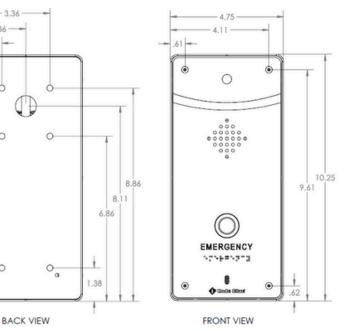



Note: Specifications subject to change without notice or obligation on the part of Code Blue Corporation.

SIDE VIEW

2.88